


793nm 200W Wavelength-Stabilized Fiber Coupled Diode Laser K793BN2RN-200.0WN0N-20022F20EFF (Customized Product)

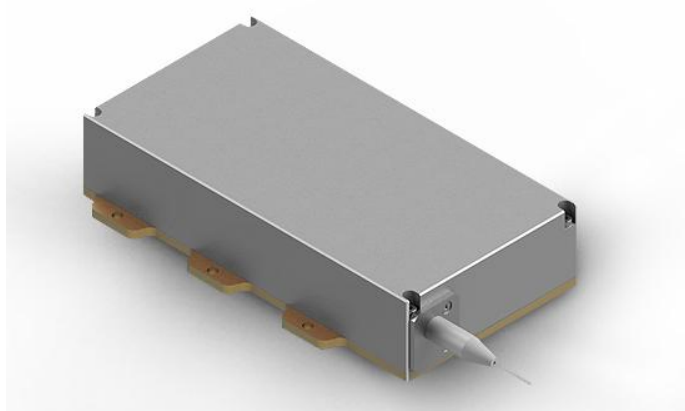

Features:


- ◆ $793\pm 1\text{nm}$ wavelength
- ◆ 200W output power
- ◆ $200\mu\text{m}$ fiber core diameter
- ◆ 0.22 NA
- ◆ 1900nm~2100nm feedback protection

Applications:

- ◆ $2\mu\text{m}$ Fiber Laser Pumping
- ◆ Medical
- ◆ Scientific Research

BWT, founded in 2003, is committed to the mission of "let the dream drive the light", the vision of becoming the "Global leader in laser solutions", and the value of "Outstanding innovation", providing diode laser, fiber laser, ultra-fast laser products and solutions to global customers.

BWT pursues continuous innovation and insists on autonomous and controllable advanced process and technology. With Beijing headquarters as the core, BWT has successively established production and R&D centers in Jiangsu, and Shenzhen, and Invested in the construction of an automated and intelligent production base in Tianjin. To build a high level of technical strength and product quality, BWT set up a German subsidiary in 2020, and taking a solid step for the internationalization of R&D, production and technological innovation.

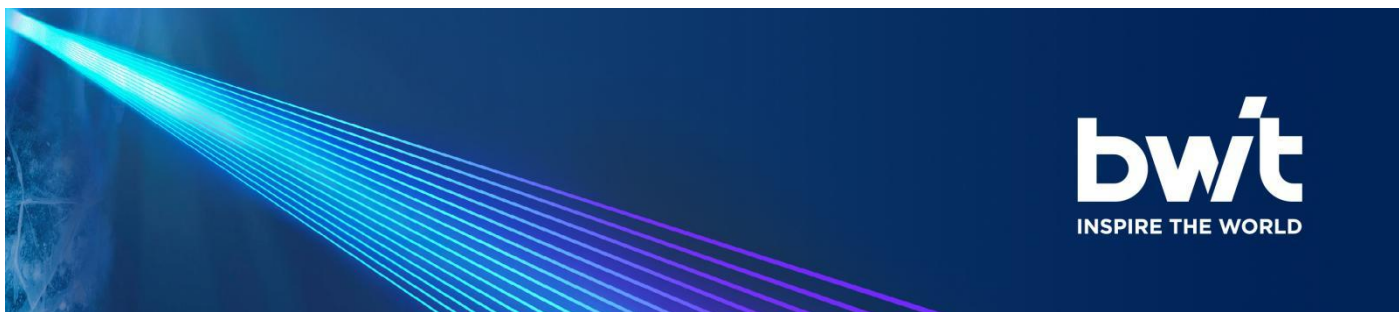


793nm 200W Wavelength-Stabilized Fiber Coupled Diode Laser K793BN2RN-200.0WN0N-20022F20EFF (Customized Product)

Specifications (25°C)		Symbol	Unit	K793BN2RN-200.0W		
				Minimum	Typical	Maximum
Optical Data ⁽¹⁾	CW Output Power	P_o	W	200.0	-	-
	Center Wavelength	λ_c	nm	793±1		
	Spectral Width (FWHM)	$\Delta\lambda$	nm	-	0.7	1
	Wavelength Shift with Temperature	$\Delta\lambda/\Delta T$	nm/°C	-	0.03	-
	Wavelength Locking Range	-	Å	(I _{op} -2A)~I _{op} @25°C		
Electrical Data	Electrical-to-Optical Efficiency	PE	%	-	38	-
	Threshold Current	I_{th}	A	-	1.0	-
	Operating Current	I_{op}	A	-	8.5	9.0
	Operating Voltage	V_{op}	V	-	68.0	75.0
	Slope Efficiency	η	W/A	-	26.0	-
Fiber Data	Core Diameter	D_{core}	μm	-	200	-
	Cladding Diameter	D_{clad}	μm	-	220	-
	Numeric Aperture	NA	-	-	0.22	-
	Fiber Length	L_f	m	-	2	-
	Fiber Loose Tubing Diameter	-	mm	0.9		
	Minimum Bending Radius	-	mm	88	-	-
	Fiber Termination	-	-	FC-Ferrule		
Feedback Isolation	Wavelength Range	-	nm	1900~2100		
	Isolation	-	dB	-	30	-
Others	ESD	V_{esd}	V	-	-	500
	Storage Temperature ⁽²⁾	T_{st}	°C	-20	-	70
	Lead Soldering Temp	T_{ls}	°C	-	-	260
	Lead Soldering Time	t	sec	-	-	10
	Operating Case Temperature ⁽³⁾	T_{op}	°C	-	25	-
	Relative Humidity	RH	%	15	-	75

(1) Data measured under operation output at nominal output power@25°C.


(2) A non-condensing environment is required for operation and storage.

(3) Operating temperature defined by the package case. Acceptable operating range is 25±2°C, but performance may vary.

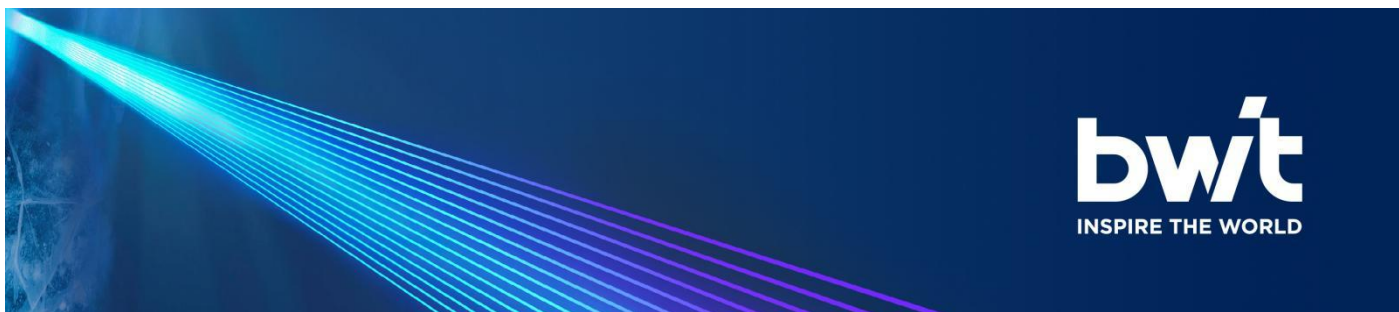

793nm 200W Wavelength-Stabilized Fiber Coupled Diode Laser K793BN2RN-200.0WN0N-20022F20EFF (Customized Product)

Package Dimensions (mm)

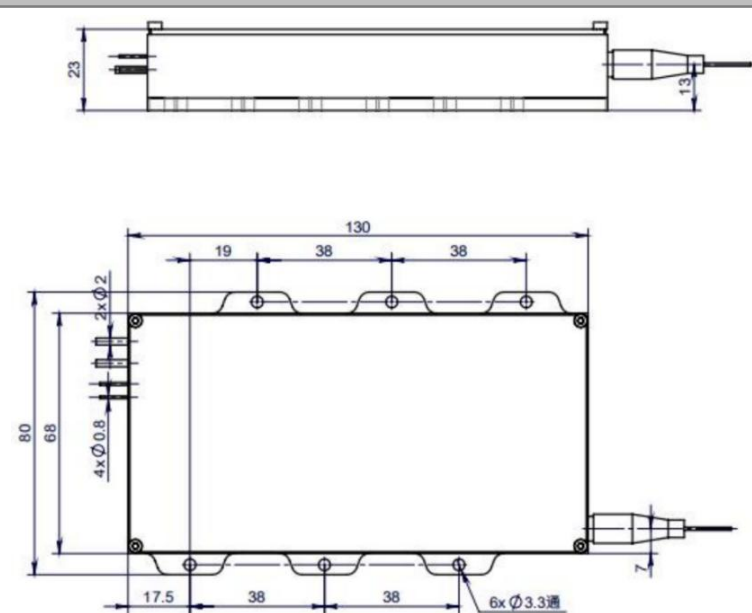

Pi n	Function
1	LD (-)
2	LD (+)
3	Thermistor (Optional)
4	Thermistor (Optional)
5	Photo Diode(P)(Optional)
6	Photo Diode(N)(Optional)

OPERATING NOTES

- ◆ Avoid eye and skin exposure to direct radiation during operation.
- ◆ ESD precautions must be taken during transportation, storage, and operation. A short-circuit connection is required between pins during transportation and storage.
- ◆ For lasers with operating currents above 6A, connect leads by soldering. The soldering point should be as close to the middle of the pins as possible, with a temperature below 260°C and a soldering time of less than 10 seconds.
- ◆ Before operating the laser, ensure that the fiber output end is properly cleaned. Follow safety protocols when handling and cutting fiber to avoid injury.
- ◆ Use a constant current power supply and avoid surges during operation.
- ◆ Operate within the rated current and power levels.
- ◆ Ensure proper cooling during operation.
- ◆ The operating temperature range is 23°C to 27°C.
- ◆ The storage temperature range is -20°C to +70°C.



Declaration: information and specifications contained herein are deemed to be reliable and accurate. BWT Beijing Ltd.reserves the right to change, alter or modify the design and specifications of these products at any time without notice.